


Multi49 Corner

ambe[®]

Specification Sheet

SPECIFICATIONS

| | |
|--------------------|--------------------------------------------------------------------------------|
| Product Dimensions | 1242W x 540H x 320D mm |
| Glass Size | 1236W x 420H x 199D mm |
| Power Requirement | 3 pin earthed 230V power outlet or a hard wire connection that can be isolated |
| Heat Output | 1.6kW |
| Cord Length | 1.8m |

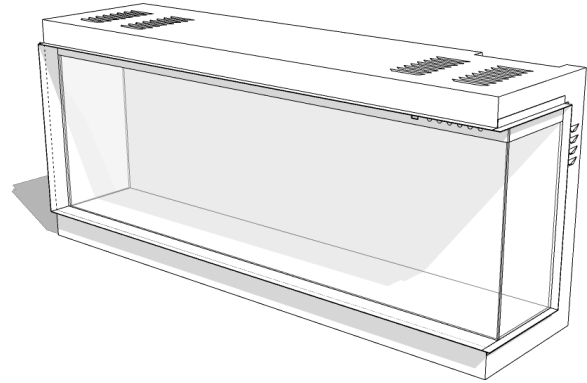

CLEARANCES

Chassis Clearance

The fire chassis is zero clearance rated. Heat resistant material is not required for install.

TV Clearance

TV can be installed **150mm** from above the glass

Cavity Base

This appliance **MUST** be fully supported on its base, over the entire area of the underside of the appliance. The base must also be level and strong enough to support the total product weight (46kgs).

Clearance to Combustible Materials

Keep combustible materials including bedding, curtains, and clothes at least 1m from the **front** of the fire.

FUELBEDS


The Ambe Multi49 electric fireplace includes four interchangeable fuelbeds.



Classic Logs and Embers



Clear Acrylic



Black Acrylic




White Stone

CAVITY CONSTRUCTION & INSTALLATION PROCESS


Before installation, refer to installation manual for safety information.

Step 1

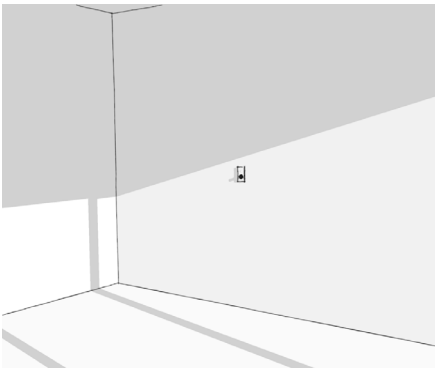

Find a suitable location with an electrical outlet within **1m** of the fireplace.

Step 2

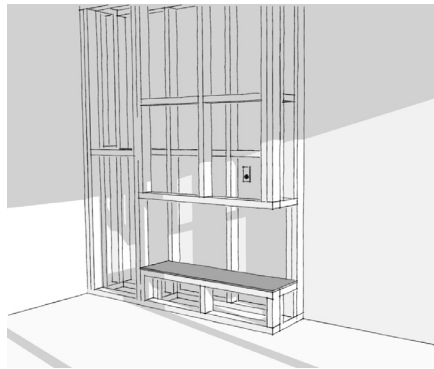


Construct the cavity to the desired size, allowing for the following wall opening dimensions: **1252W x 550H x 340D mm**

Step 3




Insert the fireplace into the wall opening and align to the framework. Fix in place with the 6 supplied brackets.

Step 4

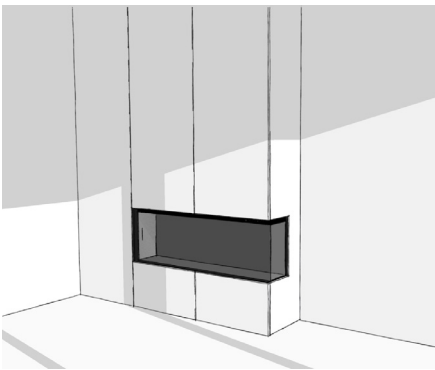

Protect the glass panel and install the selected wall linings or panels. Maintain a 5mm gap to the fireplace viewing area.

Step 5

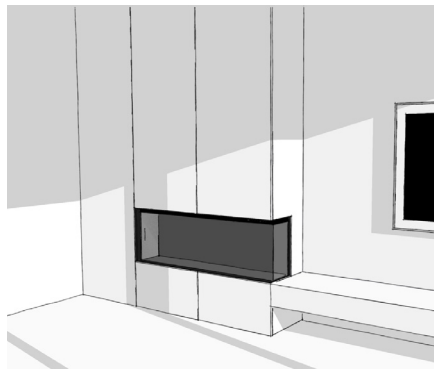

Finalise all finishes and fixtures to complete the project.